

1435-1650MHz VOLTAGE CONTROLLED OSCILLATOR

Features

- Frequency: 1435-1650MHz
- Tuning Voltage: 0.5-5.0V
- Power Output: +7dBm
- Phase Noise: -90dBc/Hz @ 10KHz offset
- Power Supply: +6V to +15V DC
- Temperature: -40 °C to +70 °C
- SMA Connectors

Picture



Description



VCO-1540 is a wide range voltage controlled oscillator with frequency range of 1435 to 1650MHz.

Electrical Specifications @ +25 °C

Parameter	Unit	Minimum	Typical	Maximum
Frequency Range	MHz	1435		1650
Tuning Voltage	Vdc	0.5		5.0
Phase Noise @ 10KHz offset (1 Hz BW, typ)	dBc/Hz		-90	
Tuning Sensitivity	MHz/V		80	
Power Output	dBm	+5	+7	+9
Harmonic Suppression (2 nd)	dBc		-7	
Load Impedance	Ω		50	
Input Capacitance	pF		50	
Frequency Pulling	MHz		<35	
Supply Voltage	V	+6	+12	+15
Supply Current	mA		12	
Operating Temp Range	°C	-40		+70

1435-1650MHz VOLTAGE CONTROLLED OSCILLATOR

Typical Performance @ +25 °C

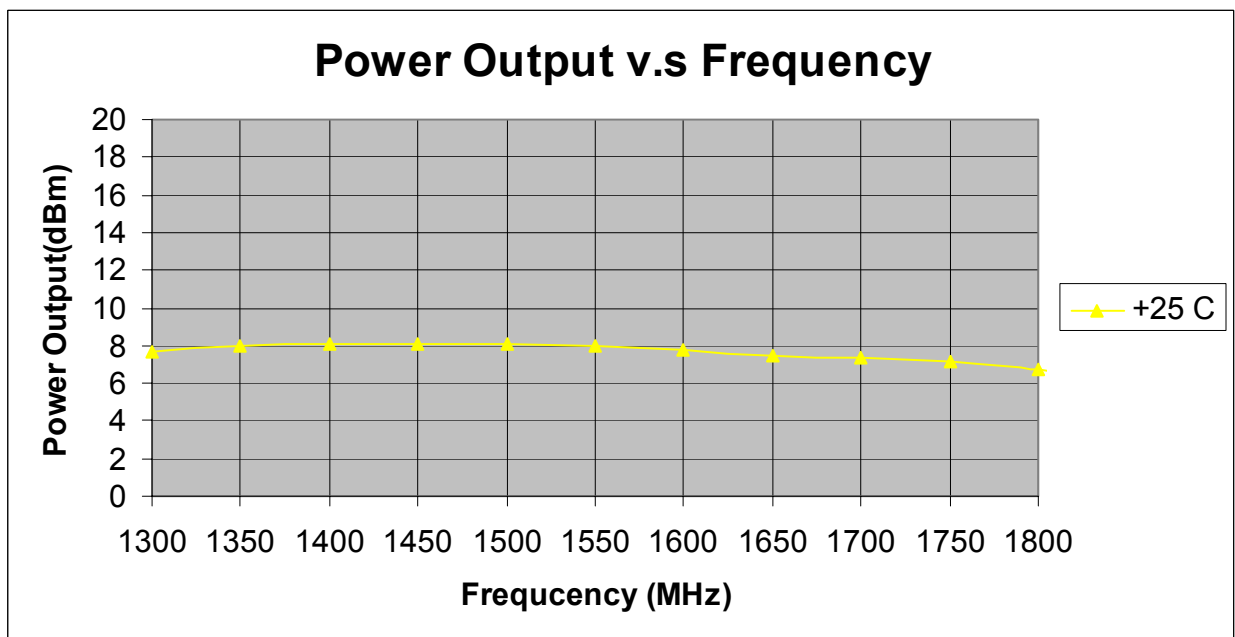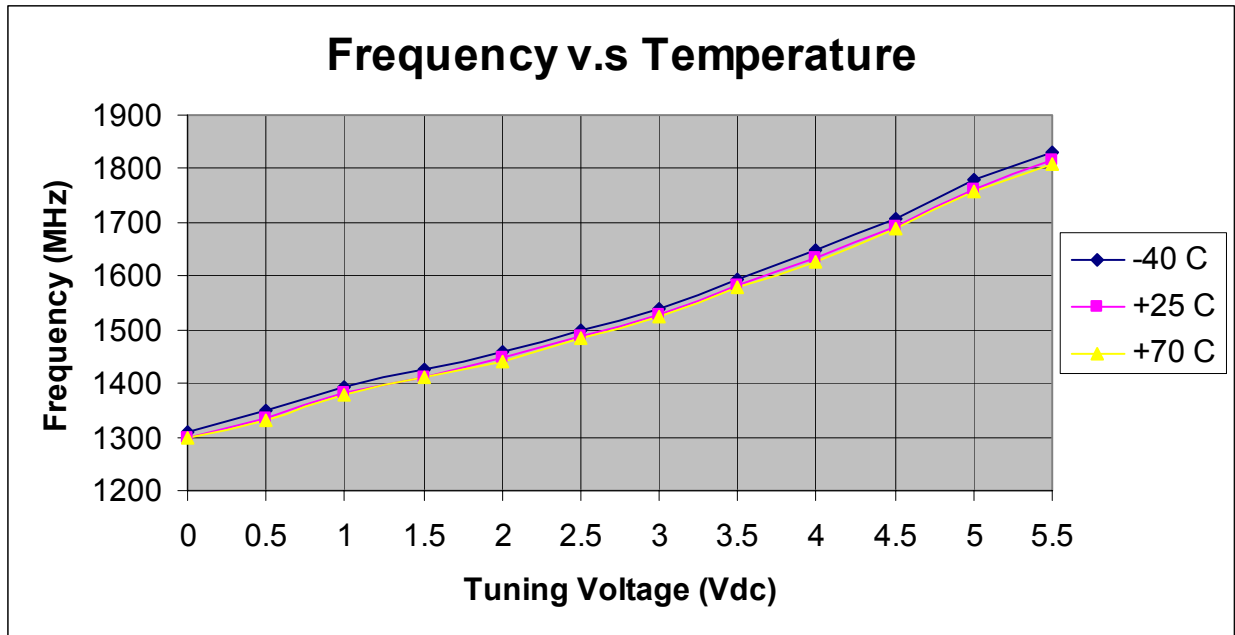


1435-1650MHz VOLTAGE CONTROLLED OSCILLATOR

Absolute Maximum Ratings

Parameter	Absolute Maximum
Power Supply Voltage	+16V
Operating Temperature	-40 °C to +70 °C
Storage Temperature	-55 °C to +100 °C

Outline

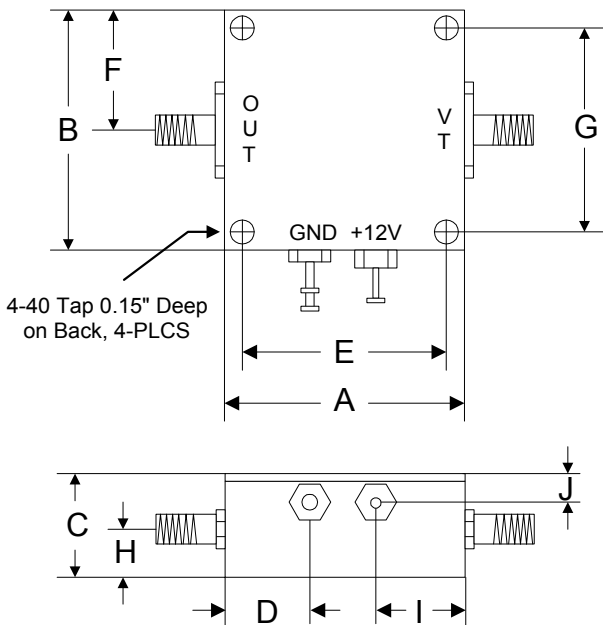

	A	B	C	D	E	F	G	H	I	J
Inch	1.250	1.250	0.563	0.450	1.000	0.625	1.000	0.500	0.500	0.187
mm	31.75	31.75	14.29	11.43	25.40	15.88	25.40	12.70	12.70	4.76