



FPS Series

0.5 – 6.0GHz Divide-By-85 Prescaler

Features

- Input Frequency: 0.5-6.0GHz
- Output Frequency: 5.88-70.58MHz
- Divide Ratio: 85
- Output Power: 0dBm
- Phase Noise: -144dBc/Hz
- DC Power: 12V
- SMA Connector

Description

FPS-85-6 is a wideband frequency divider with divide ratio of 85. The AC coupled square wave output with 1.4 Vp-p swing fits many PLL applications.

Electrical Specifications @ +25 °C, $Z_S = Z_L = 50$ Ohms


Parameter	Unit	Minimum	Typical	Maximum
Input Frequency Range	GHz	0.5		6.0
Output Frequency Range	MHz	5.88		70.58
Fixed Divide Ratio			85	
Input Power Range				
f = 0.5GHz – 1.0GHz	dBm	-11	-15	+12
f = 1.0GHz – 6.0GHz	dBm	-12	-15	+12
Output Power to 50 Ohm Load	dBm		0	
Output Voltage Swing (8pF Load)	Vp-p	1.0	1.4	
SSB Phase Noise (100KHz Offset)	dBc/Hz		-144	
DC Power Supply	V	7	12	15
Supply Current	mA		85	



Absolute Maximum Ratings

Parameter	Absolute Maximum
RF Input Power	+13dBm
Supply Voltage	+16V
Operating Temperature	-40 °C to +85 °C
Storage Temperature	-55 °C to +100 °C

Outline

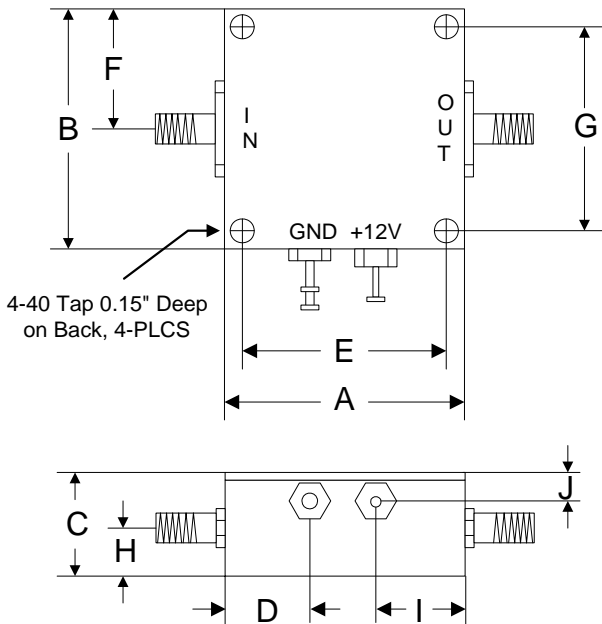

	A	B	C	D	E	F	G	H	I	J
Inch	1.250	1.250	0.563	0.450	1.000	0.625	1.000	0.250	0.500	0.187
mm	31.75	31.75	14.29	11.43	25.40	15.88	25.40	6.35	12.70	4.76