

LNA Series

2200 – 3200MHz Low Noise Amplifier

Features

- Frequency Range: 2.2-3.2GHz
- Gain: 23dB
- P_{1dB}: +10dBm
- IP3: +20dBm
- Noise Figure: 1.7dB
- DC Power: 12V
- SMA Connector

Description







LNA-2700 is a wideband Low Noise Amplifier operates with frequency range usable from 2.2GHz to 3.2GHz.

Performance measured @ 2.7GHz

Electrical Specifications @ +25 °C

Parameter	Unit	Minimum	Typical	Maximum
Frequency Range	GHz	2.2		3.2
Gain f = 2.2GHz	dB		24	
f = 2.7GHz	dB		23	
f = 3.2GHz	dB		24	
P _{1dB} f = 2.2GHz	dBm		+10	
f = 2.7GHz	dBm		+10	
f = 3.2GHz	dBm		+10	
IP3 f= 2.7GHz	dBm		+20	
Noise Figure f = 2.2GHz	dB		2.0	
f = 2.7GHz	dB		1.7	
f = 3.2GHz	dB		1.8	
VSWR f = 2.7GHz				
Input VSWR			2.5:1	
Output VSWR			1.5:1	
DC Power Supply	V	6	12	15
Supply Current	mA		45	


Typical Performance @ +25 °C

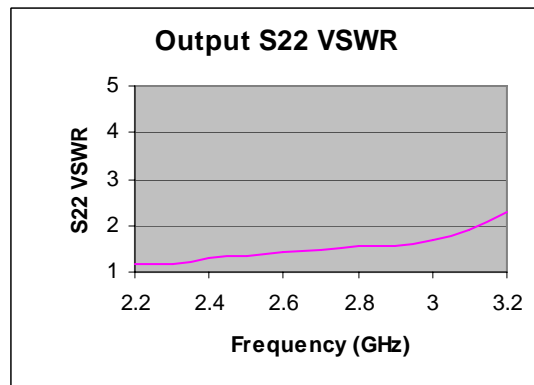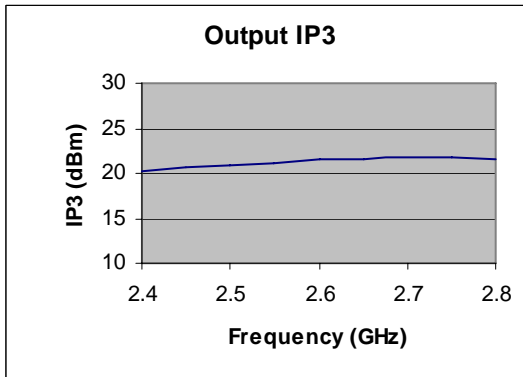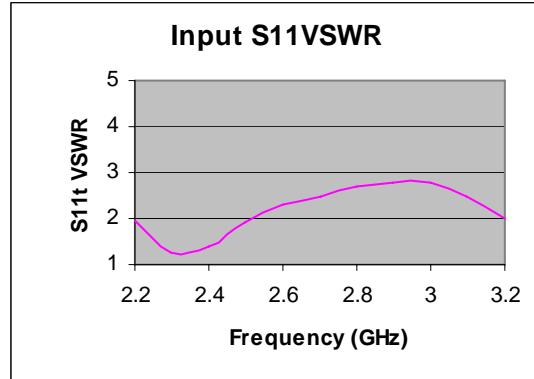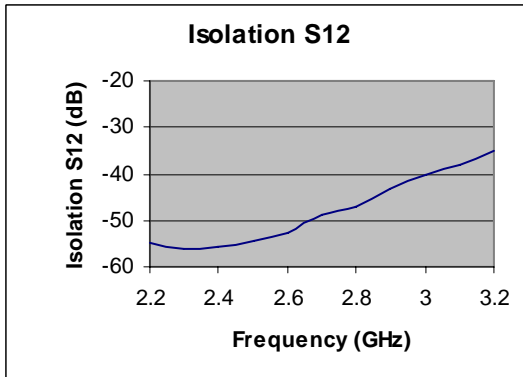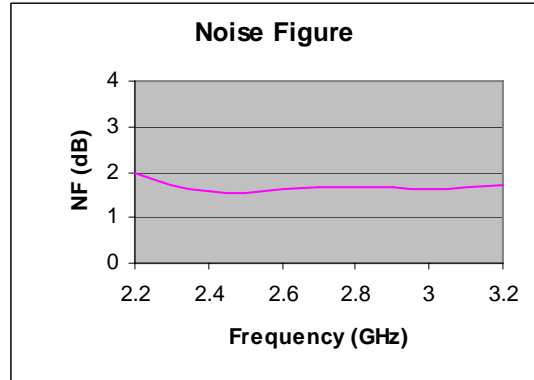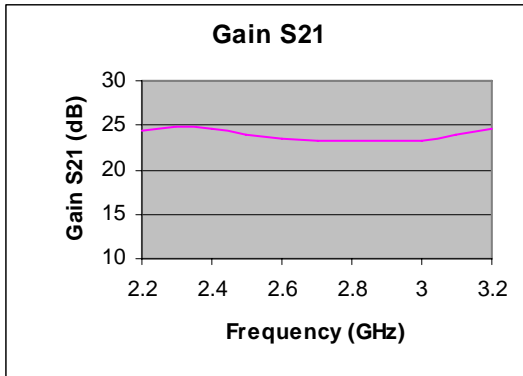

Absolute Maximum Ratings

Parameter	Absolute Maximum
RF Input Power	+13dBm
Supply Voltage	+16V
Operating Temperature	-40 °C to +85 °C
Storage Temperature	-55 °C to +125 °C

Outline

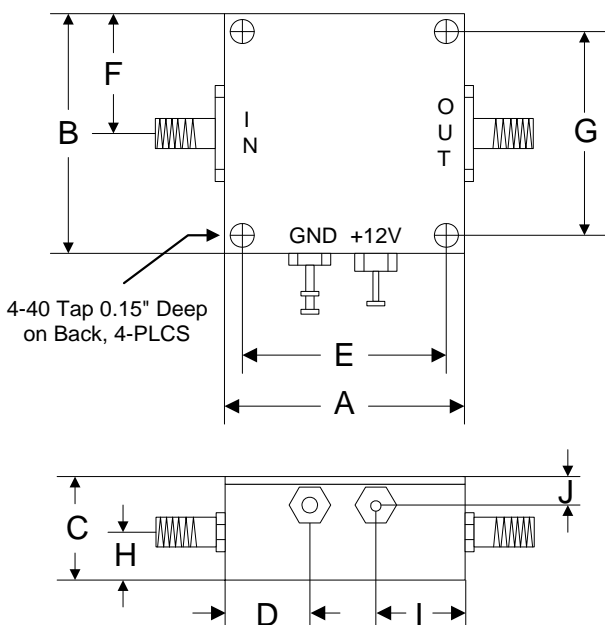

	A	B	C	D	E	F	G	H	I	J
Inch	1.250	1.250	0.563	0.450	1.000	0.625	1.000	0.250	0.500	0.187
mm	31.75	31.75	14.29	11.43	25.40	15.88	25.40	6.35	12.70	4.76