


4	No.	Revision	Date	6	Name
		Revision			
		BODY MATERIAL AND FINISH CHANGE FROM CHROMATED ALUMINIUM TO NICKEL PLATED BRASS			

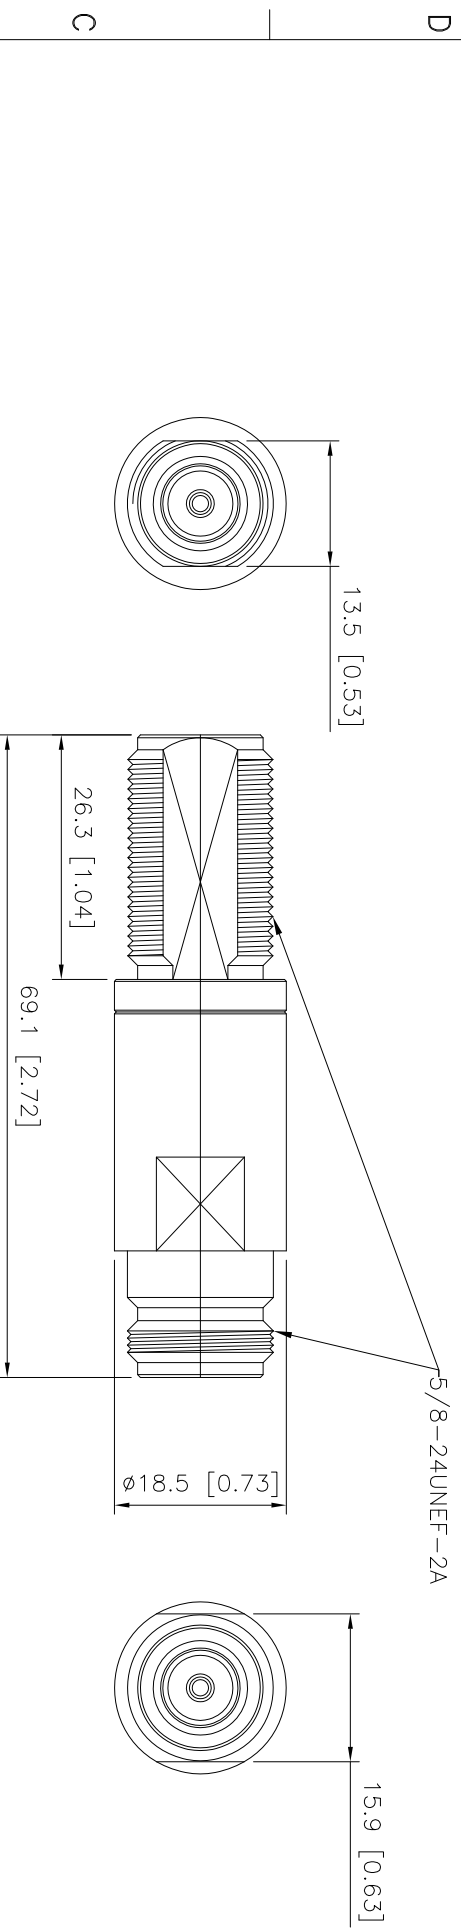

SPECIFICATIONS

1. Mechanical
  - Mating life : 500 Min.
  - Panel mounting torque : 10+2N.m
  - Materials and Finish
    - \* Center Contact : Beryllium Copper/Gold plate
    - \* Body : Brass/Nickel plate
    - \* Insulator : PTFE Teflon
  - \* Nut & Lock Washer : Brass/Nickel plate
2. Electrical
  - Impedance : 50ohm
  - Frequency range : 2GHz~6GHz
  - V.S.W.R. : 1.30 Max.
  - Insertion Loss : 0.3dB Max.
  - Let through voltage : less than  $\pm 5V$  at 8/20 $\mu s$  wave form
  - Surge life : 10times, 5kA(8/20 $\mu s$ )
3. Environmental
  - Operating Temperature :  $-35^{\circ} \sim 80^{\circ}$
  - All materials and finish complied with RoHS

N BULKHEAD JACKC TO JACK ARRESTER

NO.	DESCRIPTION	Q'ty	MATERIAL	FINISH	REMARKS.
PARTS No.	<b>50600</b>	NAME	<b>Lightning Arrester</b>		
MATERIAL	FINISH	TOLERANCES OTHERWISE SPEC. $\pm 0.05$	UNIT	ANGLES $\pm 1^{\circ}$	CHECKED
SCALE		mm			DESIGNED
DWG NO.					DATE.

*CUSTOMER*

SHIREEN INC.  
12910 Cloverleaf Center Dr Ste 110  
Germantown, MD 20874 USA