


NOTES:

1. MATERIAL AND PLATING  
SHELL:BODY=BRASS,NICK PLATED;  
CONTACT=FEMALE BERYLLIUM-OR TIN BRONZE,GOLD PLATED;  
INSULATOR=PTFE;
2. DO NOT SCALE THIS DRAWING.
3. UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE AFTER PLATING.
4. RoHS COMPLIANT
5. CHARACTERISTIC IMPEDANCE:50Ω
6. FREQUENCY RANGE:0~6GHZ
7. WORKING VOLTAGE:500VRMS
8. DIELECTRIC WITHSTANDING VOLTAGE:1500VRMS
9. VSWR:1.45 (0~6G)
10. INSULATOR RESISTANCE:5000 MEGOHMS MIN

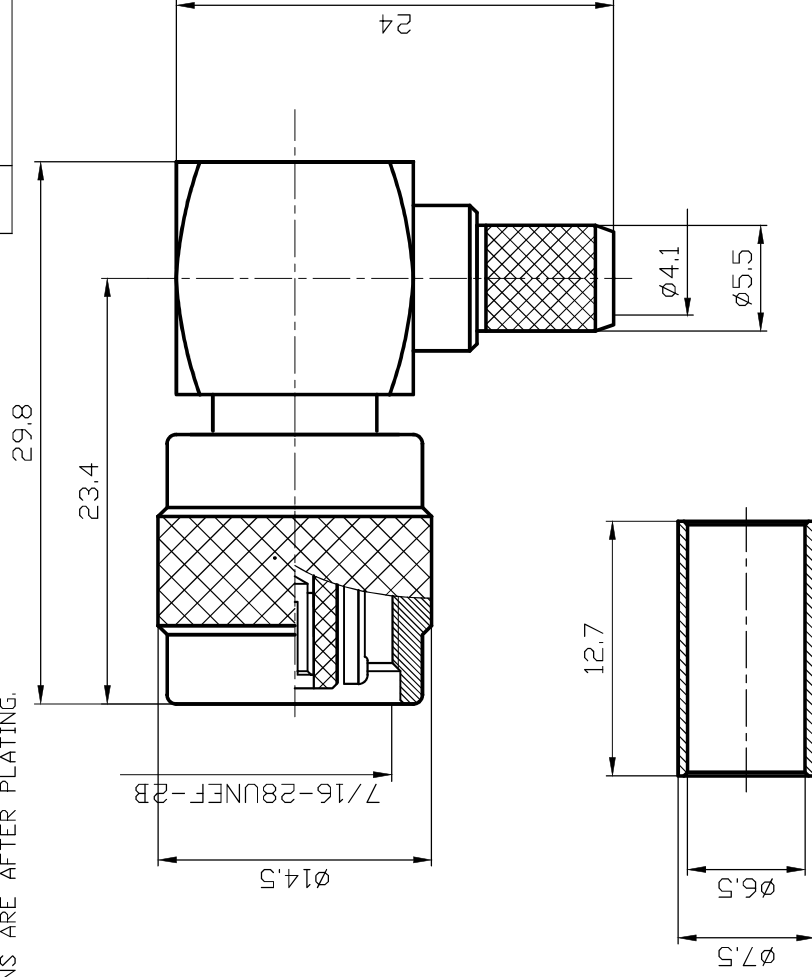

cable stripping size

REVISION D

DRAWING NO	REV	DESCRIPTION	DATE	CEO	APPR
THIRD ANGLE PROJ					

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MM AND TOLERANCES ARE:

2 PLACE DECIMAL 3 PLACE DECIMAL ANGLES

±0.015 (0.381mm) ±0.005(0.127mm) ±1°

TITLE

RP TNC Male RA

RFC240

DRAWN DATE

DRAWN DATE

MATERIAL

REFERENCE

SHIREEN INC.  
12910 Cloverleaf Center Dr Ste 110  
Germantown, MD 20874 USA

SCALE : 2.5:1 SHEET 1 OF 1

DRAWING NO

REV  
A

CON-3011