NOTES:

1. MATERIAL AND PLATING
   SHELL,BODY=BRASS,NICK PLATED;
   CONTACT=FEMALE BERYLLIUM-OR TIN BRONZE,GOLD PLATED;
   INSULATOR=PTFE;
2. DO NOT SCALE THIS DRAWING.
3. UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE AFTER PLATING.
4. RoHS COMPLIANT
5. CHARCATERISTIC IMPEDANCE:50Ω
6. FREQUENCY RANGE:0~6GHz
7. WORKING VOLTAGE:500VRMS
8. DIELECTRIC WITHSTANDING VOLTAGE:1500VRMS
9. VSWR:1.45 (0~6G)
10. INSULATOR RESISTANCE:5000 MEGOHMS MIN

	REVISIOND				
DRAWING NO	REV	DESCRIPTION	DATE	CEO	APPR
THIRD ANGLE PROJ.					

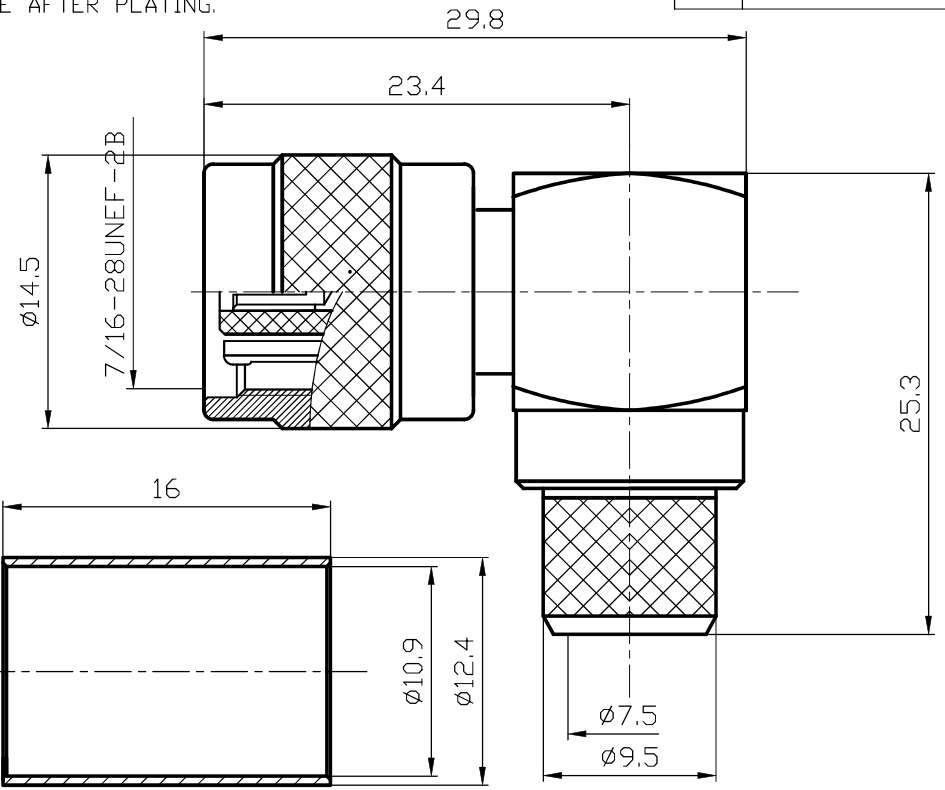

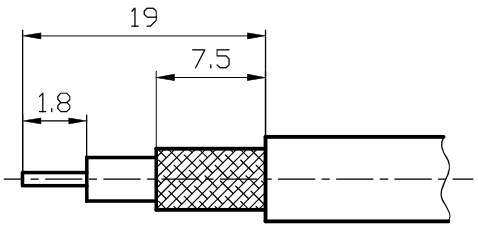

cable stripping size

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MM AND TOLERANCES ARE:

2 PLACE DESIMAL ±.015 (0.381mm)

3 PLACE DESIMAL ±.005(0.127mm)

ANGLES ±1°

MATERIAL	DRAWN DATE	TITLE	SHIREEN INC.
	DRAWN DATE	RP TNC Male RA RFC400	12910 Cloverleaf Center Dr Ste 110 Germamtown, MD 20874 USA
REFERENCE			SCALE : 2.5: 1 / SHEET 1 OF 1
	DRAWN DATE	CON-3034	DRAWING NO / REV A