


Cross Section

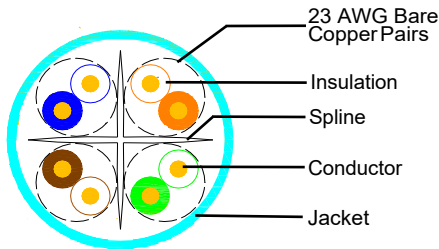

Standard Compliances

ANSI/TIA-568-C.2 CAT6
ISO/IEC 2nd Edition 11801 Class E
CENELEC EN 50173-1
IEC 61156-5, CENELEC EN 50288-6-1 for horizontal cable Flame Retardancy verified according to NFPA-262
RoHS compliance for EU Directive 2002/95/EC

Cable Description

1)Conductor

Pairs	4
Total Conductor	8
AWG	23
Material	Bare Copper

2)Insulation:

Material	FEP
Nom. Thickness	0.224mm
Dia.	Φ 1.018±0.05mm
Color Cord	White/Blue & Blue White/Orange & Orange White/Green & Green White/Brown & Brown

Unaged Elongation	Min. 200%
Unaged Tensile Strength	Min. 1754Kgf/mm ²

3)Outer Jacket:

Thickness (Nominal)	0.5 mm
Diameter (Nominal)	6.3 mm
Color	Blue
Unaged Elongation	Min. 100%
Unaged Tensile Strength	Min. 1754Kgf/mm ² Aging at 100°C for 168 Hrs:
Min. Elongation retention:	50%
Min. tensile strength retention:	75%

4)Printing:

Shireen DC-2050 CAT6 UTP ETL VERIFIED TO
ANSI/TIA-568-C.2 23AWGX4P CMP (UL) E365770 -
YEF XXXXFT

Electrical Characteristics

1. Characteristic Impedance:	772kHz	102 Ω ± 20%
	1~550MHz	100 Ω ± 15%
2. Capacitance Unbalance:	Max. 160	pF/100m
3. Mutual Capacitance:	Max. 5600	pF/100m
4. Conductor Resistance:	Max. 9.38	Ω/100m@20°C
5. Resistance Unbalanced:	Max. 2%	
6. Insulation Resistance:	>5,000 MΩ·km	
7. Dielectric Strength:	2500 VDC/2 sec	

Frequency (MHz)	Max. Attenuation (dB/100m)	NEXT (dB,Min)	PSNEXT (dB,Min)
1	2.0	74.3	72.3
4	3.8	65.3	63.3
8	5.3	60.8	58.8
10	6.0	59.3	57.3
16	7.6	56.2	54.2
20	8.5	54.8	52.8
25	9.5	53.3	51.3
31.25	10.7	51.9	49.9
62.5	15.4	47.4	45.4
100	19.8	44.3	42.3
155	25.1	41.5	39.5
200	29.0	39.8	37.8
250	32.8	38.3	36.3
300	36.4	37.2	35.2
400	43.0	35.3	33.3
550	51.6	33.2	32.2