

900-1200MHz VOLTAGE CONTROLLED OSCILLATOR

Features

- Frequency: 900-1200MHz
- Tuning Voltage: 1.0-8.0V
- Power Output: +11dBm
- Phase Noise: -100dBc/Hz @ 10KHz offset
- Power Supply: +6V to +15V DC
- Temperature: -40 °C to +85 °C
- SMA Connectors

Description

VCO-1050 is a wide range voltage controlled oscillator with frequency range of 900 to 1200MHz.

Picture





Electrical Specifications @ +25 °C

Parameter	Unit	Minimum	Typical	Maximum
Frequency Range	MHz	900		1200
Tuning Voltage	Vdc	1.0		8.0
Phase Noise @ 10KHz offset (1 Hz BW, typ)	dBc/Hz		-100	
Tuning Sensitivity	MHz/V		60	
Power Output	dBm	+9	+11	+13
Harmonic Suppression (2 nd)	dBc		-10	
Load Impedance	Ω		50	
Input Capacitance	pF		50	
Frequency Pulling	MHz		12	
Supply Voltage	V	+6	+12	+15
Supply Current	mA		25	
Operating Temp Range	°C	-40		+85

900-1200MHz VOLTAGE CONTROLLED OSCILLATOR

Typical Performance @ +25 °C

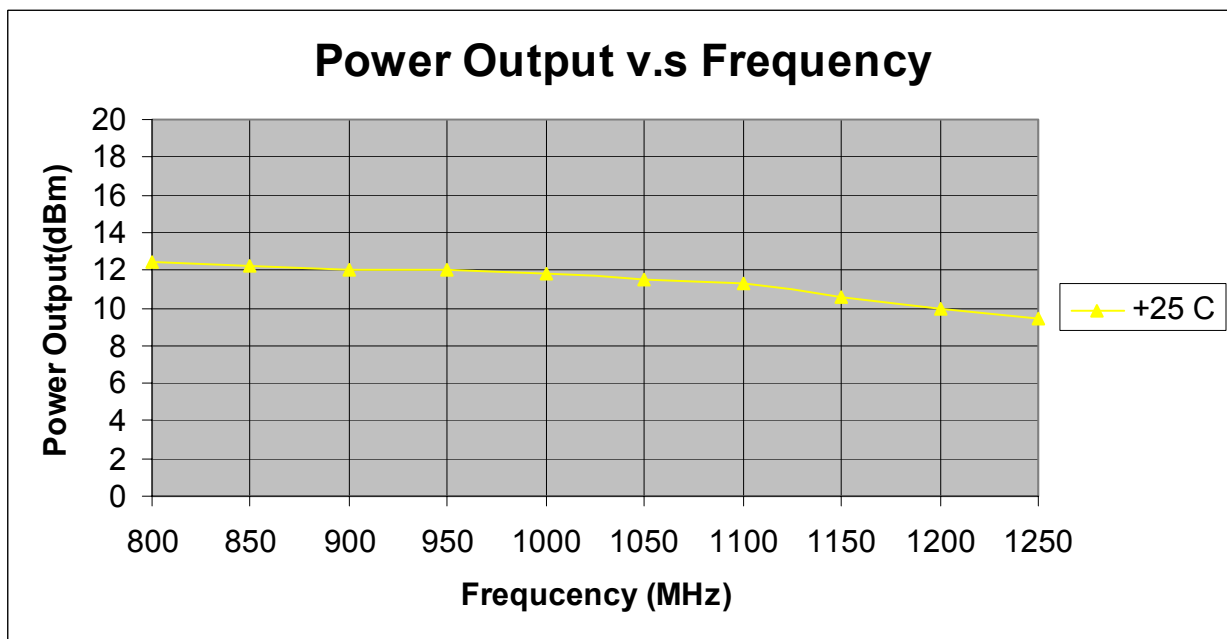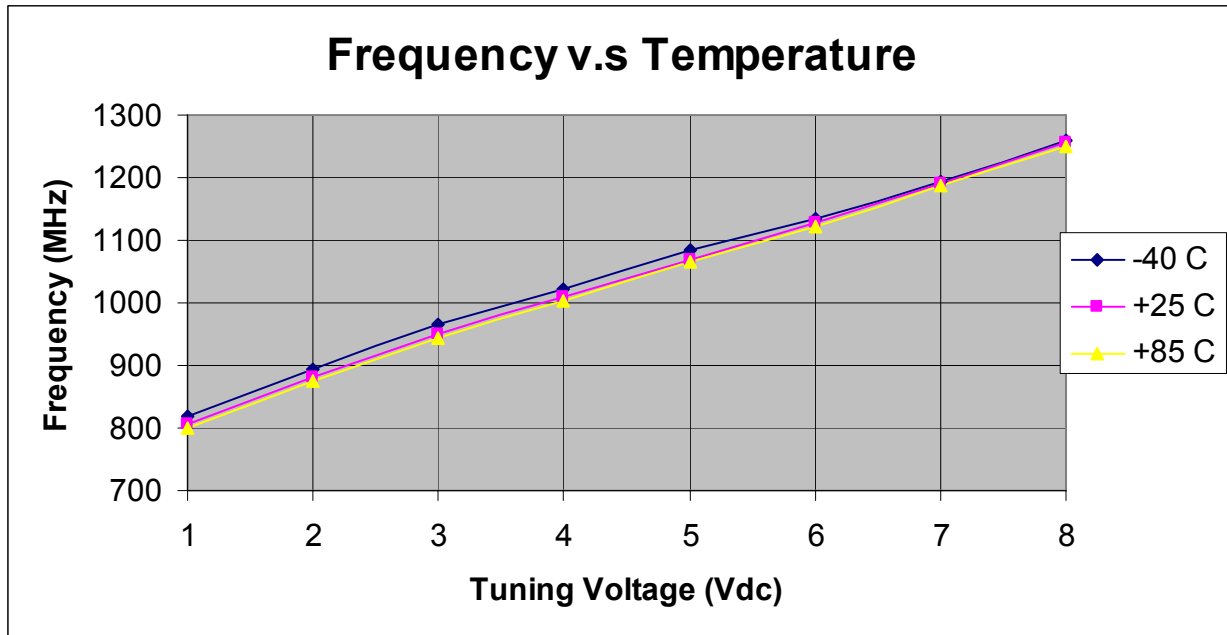




VCO-1050

900-1200MHz VOLTAGE CONTROLLED OSCILLATOR

Absolute Maximum Ratings

Parameter	Absolute Maximum
Power Supply Voltage	+16V
Operating Temperature	-40 °C to +85 °C
Storage Temperature	-55 °C to +100 °C

Outline

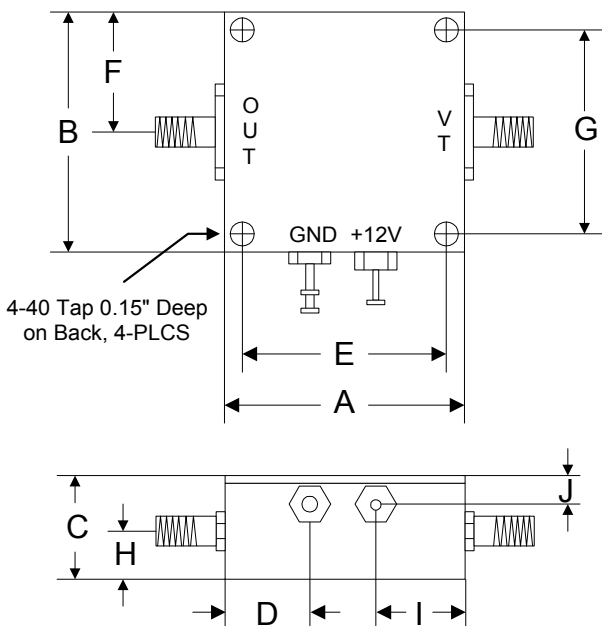

	A	B	C	D	E	F	G	H	I	J
Inch	1.250	1.250	0.563	0.450	1.000	0.625	1.000	0.500	0.500	0.187
mm	31.75	31.75	14.29	11.43	25.40	15.88	25.40	12.70	12.70	4.76